
128, av. du Maréchal-de-Lattre-de-Tassigny - 87045 LIMOGES Cedex - France
Tel: 33(0)5 55 06 87 87 - Fax: 33(0)5 55 06 88 88
www.legrand.com

Céliane™
10 AX control

Cat. No(s): CM0002




1. USE

General lighting control mechanism.
To be equipped with support, cover plate and finishing plate.

2. RANGE

Description	Cat. No.
1-way switch - Toggle mechanism Option to create a double 1-way switch in a 1-gang version	CM0002

3. DIMENSIONS (mm)

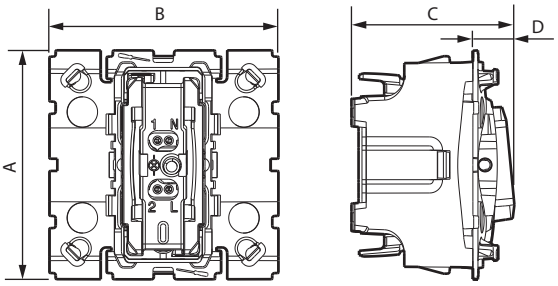

A	B	C	D
45	45	24	8

4. CONNECTION

Type of terminals : automatic
Terminals capacity: 2 x 2,5 mm²
Stripping length: 12 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics
Impact tests: IK 04
Penetration by solid bodies and liquids: IP 20

■ 5.2 Material characteristics
Mechanism: PC
Colour: grey

Halogen-free

Self-extinguishing:
850°C/30 s for insulating components holding live parts in place
650°C/30 s for other insulating components

■ 5.3 Electrical characteristics
Voltage: 250 V~
Current: 10 AX
Max. power for self-ballasted lamps: 100 W

■ 5.4 Climate characteristics
Storage temperature: -10°C to +70°C
Operating temperature: -5°C to +35°C

6. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e-catalogue.